

Guang Her Cheng Electronics Industrial Co., Ltd.

No. 47-3, Chung Cheng Rd., Tahu Village, Tahuhsiang, Miaolihsien, Taiwan.

Tel:+886-37991847 Fax:+886 37 991845 www.shonceche.com


Email:ghc.sc@msa.hient.net

PORGRAMMABLE CDI PX-01-S

MODEL: PX-01-S

SPECIFICATION:

- 1. FITS REVOLUTION SPEED: 2000~15000rpm**
- 2. APPLIED VOLTAGE :9-16**
- 3. OPERATION TEMPERATURE :-20°C ~+40°C**
- 4. "1" FOR OEM IGNTION CURVE . "ON" FOR EDIT OEM CURVE**

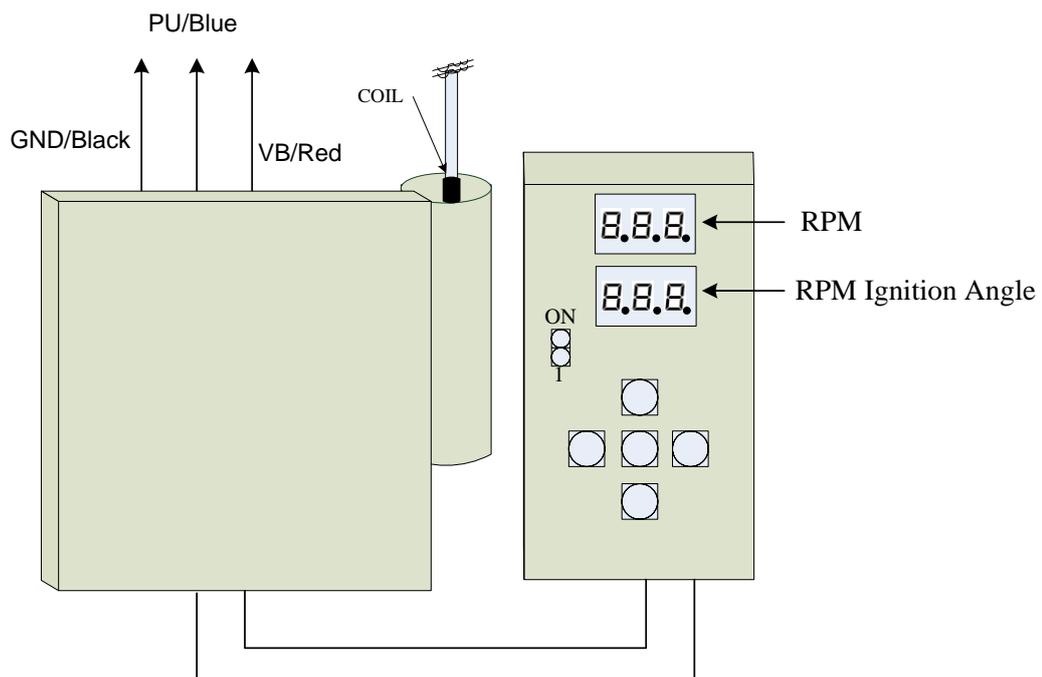


<STEP— Set up memory section P1,P2>.

CDI can be set in two memory area P1 and P2 (namely 2 curve group)

User can enter any of the two curves area to adjust and select based on need.

Instructions: Press the switch straight it enter the memory area, switch right or left goes to P1/P2 area. After set up the memory area then press straight goes to set up area.

(1)

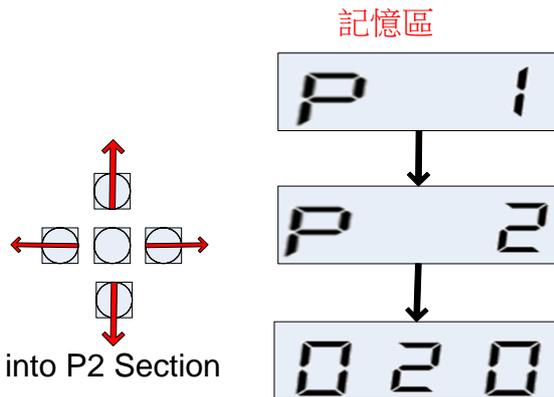

Press right hand button, Press straight into P2 Section

<Step2 –Set up RPM'S ignition delay and advance timing >.

The first digital is "(RPM) " unit is five hundred. The minimum setting is 2000RPM and the maximum setting is 15000RPM switch right or left to adjust speed. User can switch up and down to increase and decrease the delay timing, the (-) dot light on means user in the delay setting.

